

Fluids – Lecture 4 Notes

1. Thin Airfoil Theory Application: Analysis Example

Reading: Anderson 4.8, 4.9

Analysis Example


Airfoil camberline definition

Consider a thin airfoil with a simple parabolic-arc camberline, with a maximum camber height εc .

$$Z(x) = 4\varepsilon x \left(1 - \frac{x}{c}\right)$$

The camberline slope is then a linear function in x , or a cosine function in θ .

$$\frac{dZ}{dx} = 4\varepsilon \left(1 - 2\frac{x}{c}\right) = 4\varepsilon \cos \theta_o$$

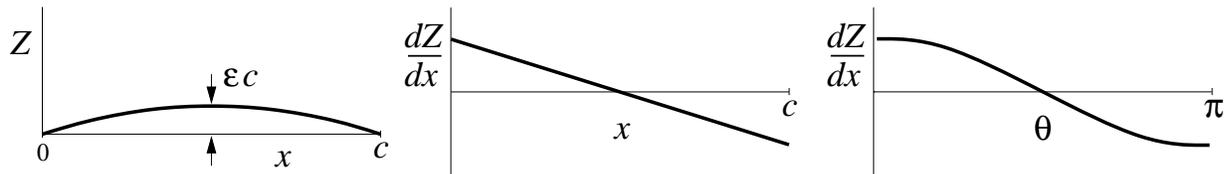

Fourier coefficient calculation

Substituting the above dZ/dx into the general expressions for the Fourier coefficients gives

$$A_0 = \alpha - \frac{1}{\pi} \int_0^\pi \frac{dZ}{dx} d\theta = \alpha - \frac{1}{\pi} \int_0^\pi 4\varepsilon \cos \theta d\theta$$

$$A_n = \frac{2}{\pi} \int_0^\pi \frac{dZ}{dx} \cos n\theta d\theta = \frac{2}{\pi} \int_0^\pi 4\varepsilon \cos \theta \cos n\theta d\theta$$

The integral in the A_0 expression easily evaluates to zero. The integral in the A_n expression can be evaluated by using the *orthogonality property* of the cosine functions.

$$\int_0^\pi \cos n\theta \cos m\theta d\theta = \begin{cases} \pi & (\text{if } n = m = 0) \\ \pi/2 & (\text{if } n = m \neq 0) \\ 0 & (\text{if } n \neq m) \end{cases}$$

For our case we have $m = 1$, and then set $n = 1, 2, 3, \dots$ to evaluate A_1, A_2, A_3, \dots . The final results are

$$\begin{aligned} A_0 &= \alpha \\ A_1 &= 4\varepsilon \\ A_2 &= 0 \\ A_3 &= 0 \\ &\vdots \end{aligned}$$

so only A_0 and A_1 are nonzero for this case.

Lift and moment coefficients

The coefficients can now be computed directly using their general expressions derived previously.


$$c_\ell = \pi(2A_0 + A_1) = 2\pi(\alpha + 2\varepsilon)$$

$$c_{m,c/4} = \frac{\pi}{4}(A_2 - A_1) = -\pi\varepsilon$$

From the $c_\ell(\alpha)$ expression above, the zero-lift angle is seen to be

$$\alpha_{L=0} = -2\varepsilon$$

which is also the angle of the *zero lift line*. In the present case of a parabolic camber line, the zero lift line passes through the maximum-camber point and the trailing edge point.

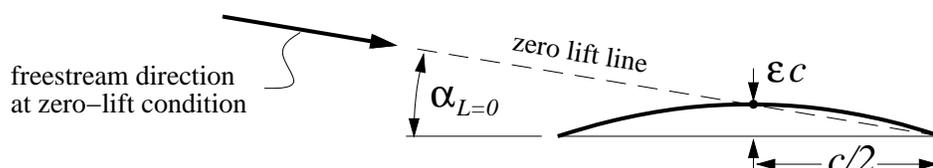


As a possible shortcut, the zero-lift angle could also have been computed directly from its explicit equation derived earlier.

$$\alpha_{L=0} = \frac{1}{\pi} \int_0^\pi \frac{dZ}{dx} (1 - \cos \theta_o) d\theta_o = \frac{1}{\pi} \int_0^\pi 4\varepsilon \cos \theta_o (1 - \cos \theta_o) d\theta_o = -2\varepsilon$$

But this integral is just the combination of the integrals for A_0 and A_1 , so there is no real simplification here.

Surface loading (further details)

In many applications, obtaining just the c_ℓ and c_m of the entire airfoil is sufficient. But in some cases, we may also want to know the force and moment on only a portion of the airfoil. For example, the force and moment on a flap are of considerable interest, since the flap hinge and flap control linkage must be designed to withstand these loads. We therefore need to know how the loading $\Delta p(x)$ is distributed over the chord, and over the flap in particular.

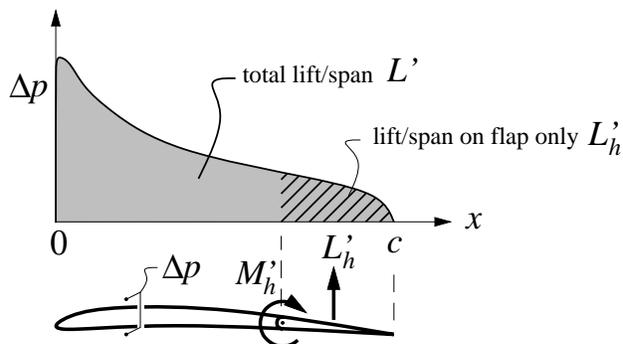

The loading Δp is directly related to the vortex sheet strength $\gamma(x)$, and can also be given in terms of the dimensionless pressure coefficient.

$$\Delta p(x) = \rho V_\infty \gamma(x) = \frac{1}{2} \rho V_\infty^2 \Delta C_p(x) \quad (1)$$

The general expression for the sheet strength, obtained previously, is

$$\gamma(\theta) = 2V_\infty \left(A_0 \frac{1 + \cos \theta}{\sin \theta} + \sum_{n=1}^N A_n \sin n\theta \right)$$

Substituting the Fourier coefficients obtained for the present case gives

$$\begin{aligned} \gamma(\theta) &= 2V_\infty \left(\alpha \frac{1 + \cos \theta}{\sin \theta} + 4\varepsilon \sin \theta \right) \\ \text{or } \Delta C_p(\theta) &= 2 \frac{\gamma(\theta)}{V_\infty} = 4\alpha \frac{1 + \cos \theta}{\sin \theta} + 16\varepsilon \sin \theta \end{aligned}$$

The integration of ΔC_p over the flap can be conveniently performed in the θ coordinate as usual, using the above expression. But it is also of some interest to examine this distribution in the physical x coordinate. The relevant relations between θ and x are

$$\begin{aligned} \cos \theta &= 1 - 2x/c \\ \sin \theta &= \sqrt{1 - \cos^2 \theta} = \sqrt{1 - (1 - 2x/c)^2} = 2\sqrt{x/c - (x/c)^2} \end{aligned}$$

which can be substituted into the above $\Delta C_p(\theta)$ expression to put it in terms of x .

$$\Delta C_p(x) = 4\alpha \sqrt{\frac{c}{x} - 1} + 32\varepsilon \sqrt{\frac{x}{c} - \left(\frac{x}{c}\right)^2}$$

Define x_h as the location of the flap hinge, so the flap extends from $x = x_h$, to the trailing edge at $x = c$. The corresponding θ locations are $\theta = \arccos(1 - 2x_h/c) \equiv \theta_h$, and $\theta = \pi$, respectively. The load/span and moment/span coefficients on the flap hinge can now be computed by integrating the pressure loading.

$$\begin{aligned} c_{\ell_h} &\equiv \frac{L'_h}{\frac{1}{2}\rho V_\infty^2 c} = \frac{1}{c} \int_{x_h}^c \Delta C_p(x) dx = \frac{1}{2} \int_{\theta_h}^{\pi} \Delta C_p(\theta) \sin \theta d\theta \\ c_{m_h} &\equiv \frac{M'_h}{\frac{1}{2}\rho V_\infty^2 c^2} = \frac{1}{c^2} \int_{x_h}^c \Delta C_p(x) (x_h - x) dx = \frac{1}{4} \int_{\theta_h}^{\pi} \Delta C_p(\theta) (\cos \theta - \cos \theta_h) \sin \theta d\theta \end{aligned}$$

Here, integrations in θ are simpler, but still somewhat tedious, and are best left for computer-based symbolic or numerical integration methods.