

VECTOR OPERATORS ∇ , \times , \bullet

Vector:


$$\bar{A} = \hat{x}A_x + \hat{y}A_y + \hat{z}A_z$$

Vector Dot Product:

$$\bar{A} \bullet \bar{B} = A_x B_x + A_y B_y + A_z B_z = |\bar{A}| |\bar{B}| \cos \theta$$

Vector Cross Product:

$$\bar{A} \times \bar{B} = \det \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ A_x & A_y & A_z \\ B_x & B_y & B_z \end{vmatrix} = |\bar{A}| |\bar{B}| \sin \theta$$



$$= \hat{x}(A_y B_z - A_z B_y) + \hat{y}(A_z B_x - A_x B_z) + \hat{z}(A_x B_y - A_y B_x)$$

“Del” (∇) Operator:

$$\nabla = \hat{x} \frac{\partial}{\partial x} + \hat{y} \frac{\partial}{\partial y} + \hat{z} \frac{\partial}{\partial z}$$

Gradient of ϕ :



$$\nabla \phi = \hat{x} \frac{\partial \phi}{\partial x} + \hat{y} \frac{\partial \phi}{\partial y} + \hat{z} \frac{\partial \phi}{\partial z}$$

Divergence of \bar{A} :

$$\nabla \bullet \bar{A} = \frac{\partial A_x}{\partial x} + \frac{\partial A_y}{\partial y} + \frac{\partial A_z}{\partial z}$$

“Curl of \bar{A} ”:

$$\nabla \times \bar{A} = \det \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ \partial/\partial x & \partial/\partial y & \partial/\partial z \\ A_x & A_y & A_z \end{vmatrix}$$

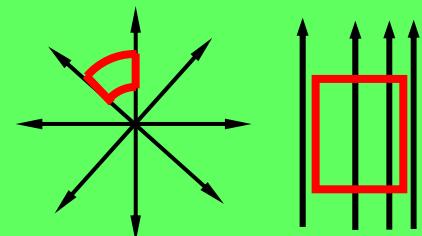


PHYSICAL SIGNIFICANCE OF $\nabla \cdot$, $\nabla \times$

$\nabla \cdot \bar{D}$ is the “divergence of the vector field \bar{D} ”

Gauss's divergence theorem: $\int_V (\nabla \cdot \bar{A}) dv = \oint_S (\bar{A} \cdot \hat{n}) da$

Gauss's Law, Differential Form: $\nabla \cdot \bar{D} = \rho$


$$\int_V (\nabla \cdot \bar{D}) dv = \oint_S (\bar{D} \cdot \hat{n}) da = \int_V \rho dv$$



$\nabla \times \bar{E}$ is the “curl of the vector field \bar{E} ”

Stokes's theorem: $\oint_C \bar{E} \cdot d\bar{s} = \iint_A (\nabla \times \bar{E}) \cdot \hat{n} da$

Faraday's Law, Differential Form: $\nabla \times \bar{E} = - \frac{\partial \bar{B}}{\partial t}$



$$\oint_C \bar{E} \cdot d\bar{s} = \iint_A (\nabla \times \bar{E}) \cdot \hat{n} da = - \iint_A \frac{\partial \bar{B}}{\partial t} \cdot \hat{n} da = \oint_C \bar{E} \cdot d\bar{s}$$

MAXWELL'S EQUATIONS




Integral Form:

$$\oint_S \bar{D} \cdot \hat{n} da = \iiint_V \rho dv$$

$$\bar{D} = \epsilon \bar{E}, \bar{B} = \mu \bar{H} \quad \oint_S \bar{B} \cdot \hat{n} da = 0$$

$$\oint_C \bar{E} \cdot d\bar{s} = - \frac{\partial}{\partial t} \iint_A \bar{B} \cdot \hat{n} da$$

$$\oint_C \bar{H} \cdot d\bar{s} = \iint_A \bar{J} \cdot \hat{n} da + \frac{\partial}{\partial t} \iint_A \bar{D} \cdot \hat{n} da$$

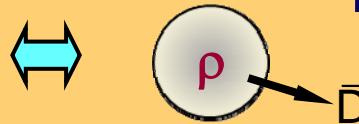

Differential Form:

$$\nabla \cdot \bar{D} = \rho$$

$$\nabla \cdot \bar{B} = 0$$

$$\nabla \times \bar{E} = - \frac{\partial \bar{B}}{\partial t}$$

$$\nabla \times \bar{H} = \bar{J} + \frac{\partial \bar{D}}{\partial t}$$

\bar{E} Electric field

[volts/meter, $V m^{-1}$]

\bar{H} Magnetic field

[amperes/meter, $A m^{-1}$]

\bar{B} Magnetic flux density

[Tesla, T]

\bar{D} Electric displacement

[ampere sec/m², $A s m^{-2}$]

\bar{J} Electric current density

[amperes/m², $A m^{-2}$]

ρ Electric charge density

[coulombs/m³, $C m^{-3}$]

MAXWELL'S EQUATIONS: VACUUM SOLUTION

Faraday's Law: $\nabla \times \bar{E} = -\frac{\partial \bar{B}}{\partial t}$

Ampere's Law: $\nabla \times \bar{H} = \bar{J} + \frac{\partial \bar{D}}{\partial t}$

Gauss's Law **Constitutive Relations**

$$\nabla \bullet \bar{D} = \rho$$

$$0$$

$$\bar{D} = \epsilon_0 \bar{E}$$

$$\bar{B} = \mu_0 \bar{H}$$

EM Wave Equation:

Eliminate \bar{H} : $\nabla \times (\nabla \times \bar{E}) = -\mu_0 \frac{\partial}{\partial t} (\nabla \times \bar{H})$

Use identity: $\nabla \times (\nabla \times \bar{A}) = \nabla(\nabla \bullet \bar{A}) - \nabla^2 \bar{A}$

Yields:

$$\nabla(\nabla \bullet \bar{E}) - \nabla^2 \bar{E} = -\mu_0 \frac{\partial}{\partial t} (\nabla \times \bar{H}) = -\mu_0 \epsilon_0 \frac{\partial^2 \bar{E}}{\partial t^2}$$

EM Wave Equation¹

$$\nabla^2 \bar{E} - \mu_0 \epsilon_0 \frac{\partial^2 \bar{E}}{\partial t^2} = 0$$

Second derivative in space \propto second derivative in time,
therefore solution is any $f(r,t)$ with identical dependencies on r,t

¹Laplacian Operator: $\nabla \bullet (\nabla \phi) = \nabla^2 \phi = \left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} + \frac{\partial^2}{\partial z^2} \right) \phi$

WAVE EQUATION SOLUTION

Many are possible \Rightarrow Try Uniform Plane Wave (UPW), $\neq f(x,y)$

Example: Try: $E = \hat{y} E_y(z)$ in $\nabla^2 \bar{E} - \mu_0 \epsilon_0 \frac{\partial^2 \bar{E}}{\partial t^2} = 0$


$$\Rightarrow \nabla^2 E_y = \left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} + \frac{\partial^2}{\partial z^2} \right) E_y$$

Yields: $\frac{\partial^2 E_y}{\partial z^2} - \mu_0 \epsilon_0 \frac{\partial^2 E_y}{\partial t^2} = 0$

Trial solution: $E_y(z,t) = E_+(t - z/c)$; $E_+(\text{arg})$ = arb. function of (arg)

Test solution: $c^{-2} E''_+ (t - z/c) - \mu_0 \epsilon_0 E''_+ (t - z/c) = 0$ iff:

$$c = \frac{1}{\sqrt{\mu_0 \epsilon_0}} \approx 3 \times 10^8 \text{ [m s}^{-1}\text{]} \text{ in vacuum (velocity of light)}$$

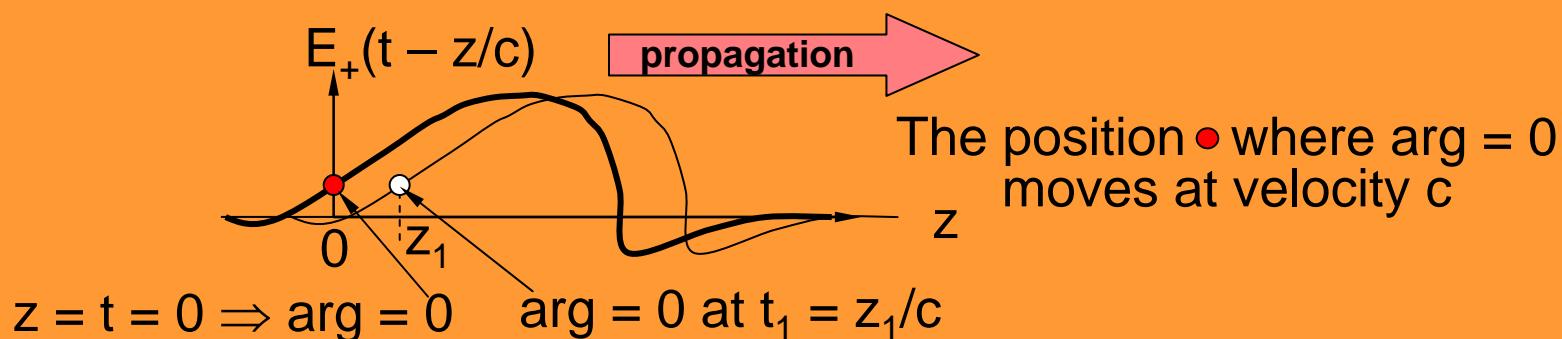

UNIFORM PLANE WAVE IN Z-DIRECTION

Example: $E_y(z,t) = \underbrace{E_+}_{\text{Func(arg)}} \underbrace{(t - z/c)}_{\text{Func}^*(-c)(arg)} [\text{V/m}]$

$$\text{Func(arg)} = \text{Func}^*(-c)(\text{arg}) = \text{Func}^*(z - ct)$$

E.G.: $E_y(z,t) = E_+ \cos[\omega(t - z/c)] = E_+ \cos(\omega t - kz),$
where $k = \omega/c = \omega\sqrt{\mu_0\epsilon_0}$

To find magnetic fields:

$$\text{Faraday's Law: } \nabla \times \bar{E} = -\frac{\partial \bar{B}}{\partial t} \Rightarrow \bar{H} = -\int (\nabla \times \bar{E}) \mu_0^{-1} dt$$

$$\nabla \times \bar{E} = \det \begin{vmatrix} \hat{x} & \hat{y} & \hat{z} \\ \partial/\partial x & \partial/\partial y & \partial/\partial z \\ E_x & E_y & E_z \end{vmatrix} = -\hat{x} \partial E_+ \cos(\omega t - kz) / \partial z = -\hat{x} k E_+ \sin(\omega t - kz)$$


$$\bar{H} = \hat{x} \int (k/\mu_0) E_+ \sin(\omega t - kz) dt = -\hat{x} (E_+ / \eta_0) \cos(\omega t - kz)$$

$$k = \omega \sqrt{\mu_0 \epsilon_0}, \quad \eta_0 = \sqrt{\mu_0 / \epsilon_0}$$

UNIFORM PLANE WAVE: EM FIELDS

EM Wave in z direction:


$$\bar{E}(z,t) = \hat{y}E_+ \cos(\omega t - kz), \quad \bar{H}(z,t) = -\hat{x}(E_+/\eta_0) \cos(\omega t - kz)$$

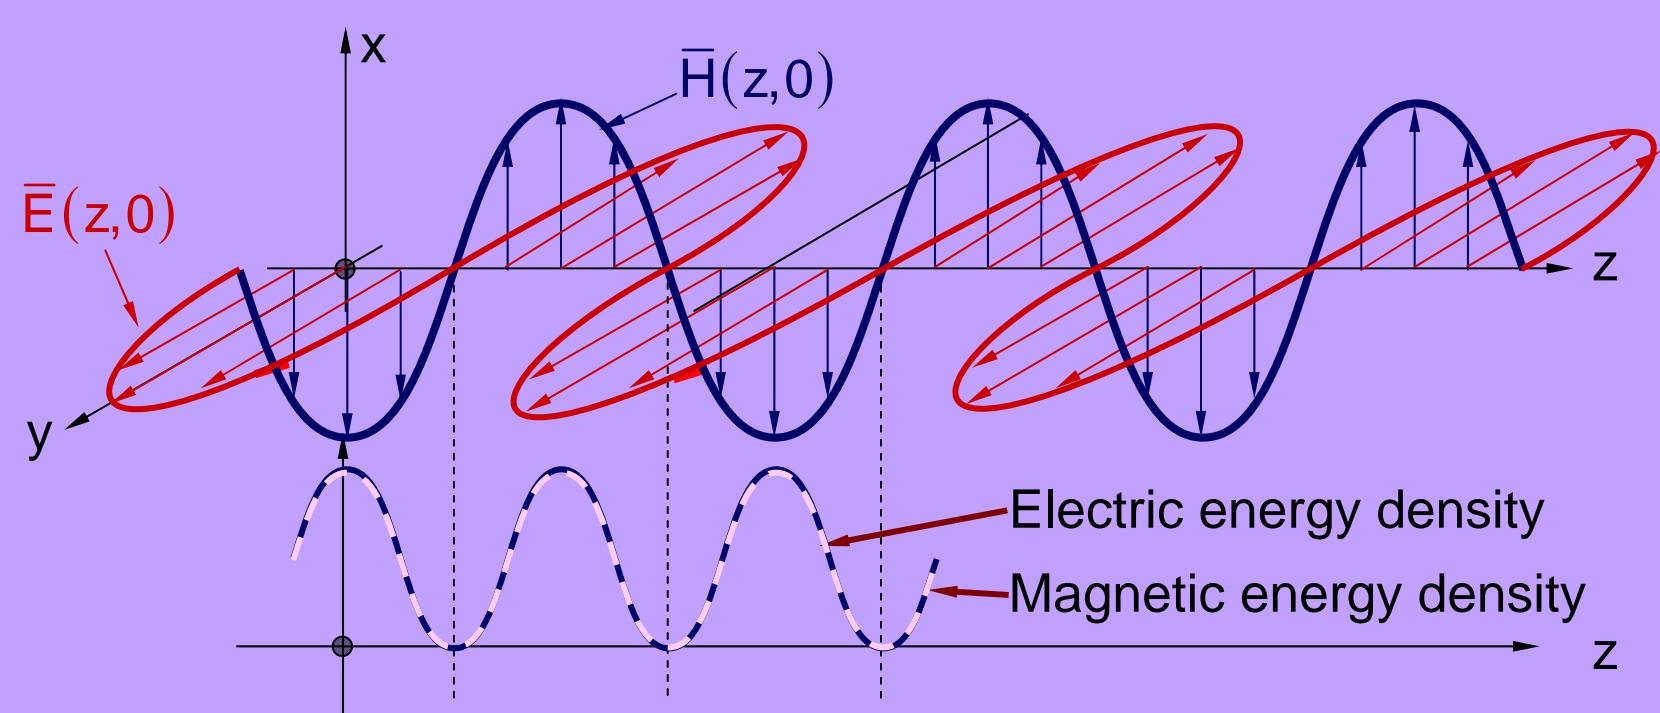

Linearity implies superposition of $n \rightarrow \infty$ waves, all θ, ϕ


ELECTROMAGNETIC AND OTHER WAVES

A “wave” is a fixed disturbance propagating through a medium

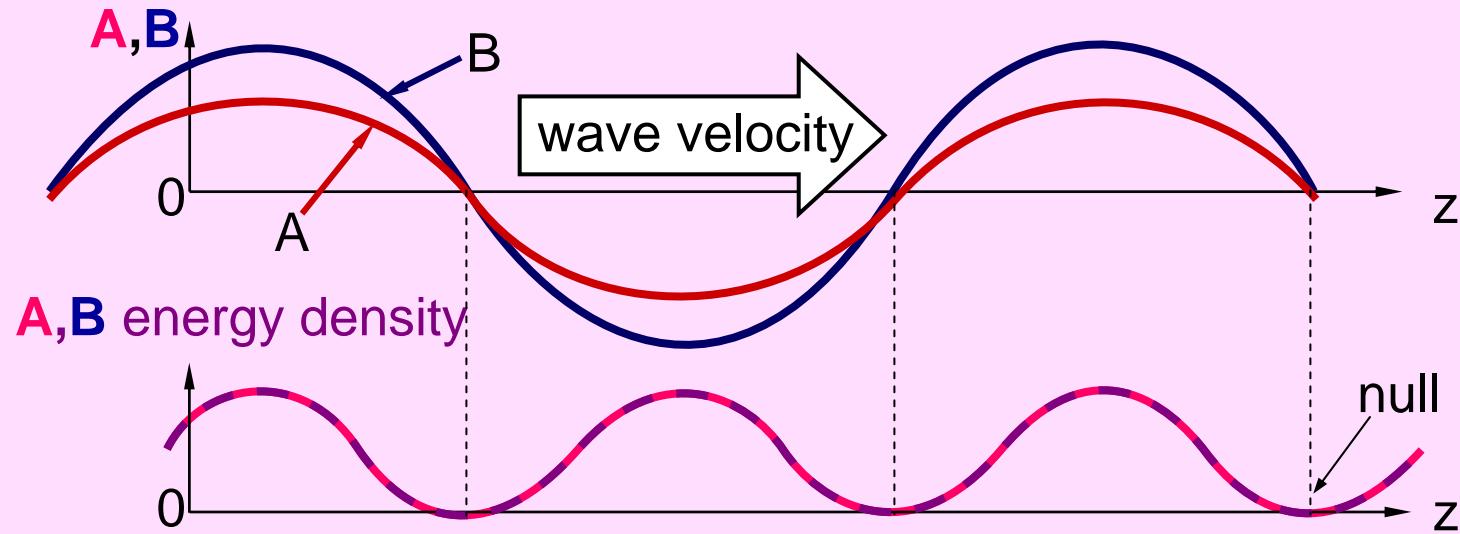

| Medium | A | B | A energy | B energy |
|-----------------|----------|----------|-----------|----------|
| String | stretch | velocity | potential | kinetic |
| Acoustic | pressure | velocity | potential | kinetic |
| Ocean | height | velocity | potential | kinetic |
| Electromagnetic | H | E | magnetic | electric |

Role of Maxwell's Equations and Fields

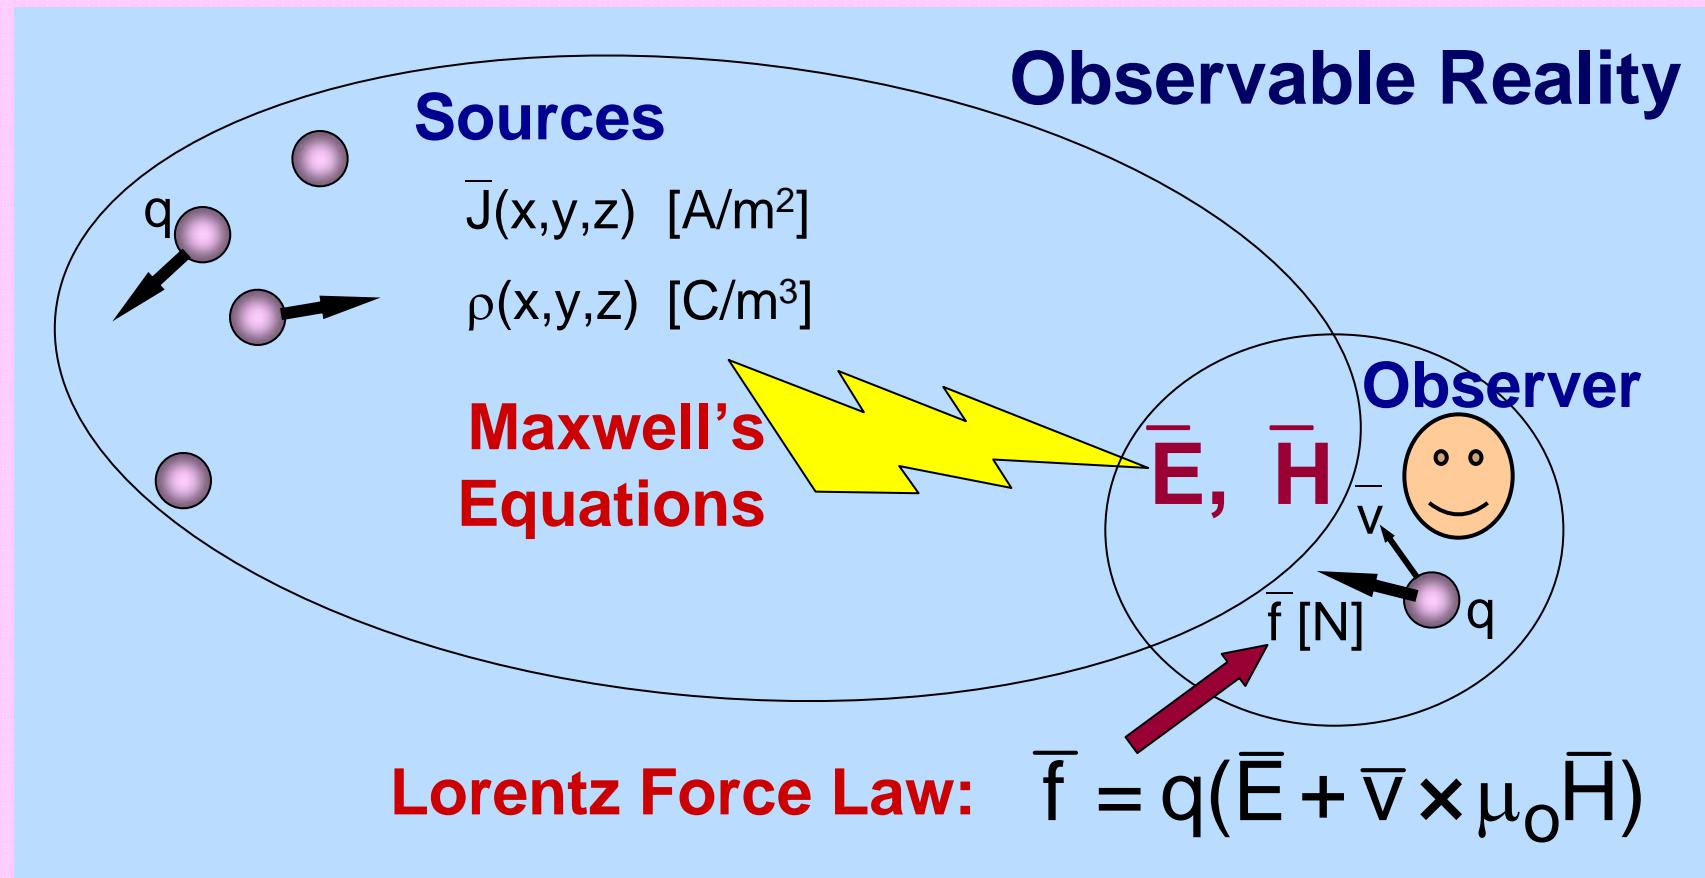

The fields \bar{E} , \bar{H} and the displacement and flux densities \bar{D} , \bar{B} permit division of electromagnetics into the Maxwell and Lorentz equations

MIT OpenCourseWare
<http://ocw.mit.edu>

6.013 Electromagnetics and Applications
Spring 2009

For information about citing these materials or our Terms of Use, visit: <http://ocw.mit.edu/terms>.