

Previous Conclusions

- **Concrete will continue to be a dominant construction material**
- **Reinforced concrete must crack in order for reinforcing to work → lower durability because steel can corrode**
- **Prestressed concrete prevents cracking**
- **Two powerful design methods: moment diagrams or strut and tie models**
- **Environmental impact can be reduced through design: minimize material and recycle waste**


Steel Structures

- **Technical concepts:**
 - **Structural failure**
 - **Ductility**
 - **Buckling**
 - **Shear diagrams**

Steel Structures

- **Recent structures in steel**
- **Material properties – definitions**
- **Structural failure**
- **Environmental issues**
- **Conclusions**

Stuttgart Airport, 1991, Germany

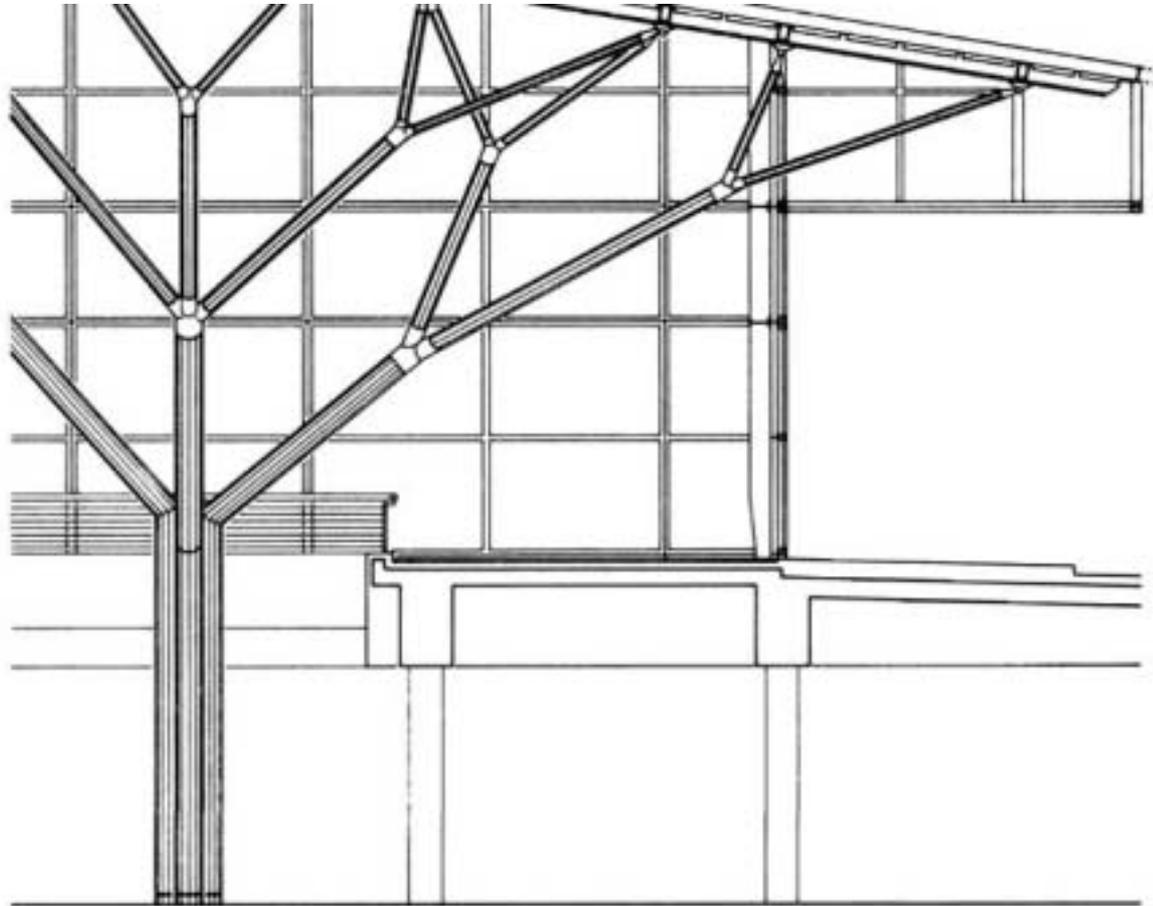


Structural Design in Steel

- **Can resist tension and compression**
- **Slender elements in compression may buckle**
- **Very lightweight structures, so vibrations are a problem**
- **Follow moment diagram to minimize material use**


Why is steel a good structural material?

- **High strength**
- **Ductile material**

Ductility of Steel

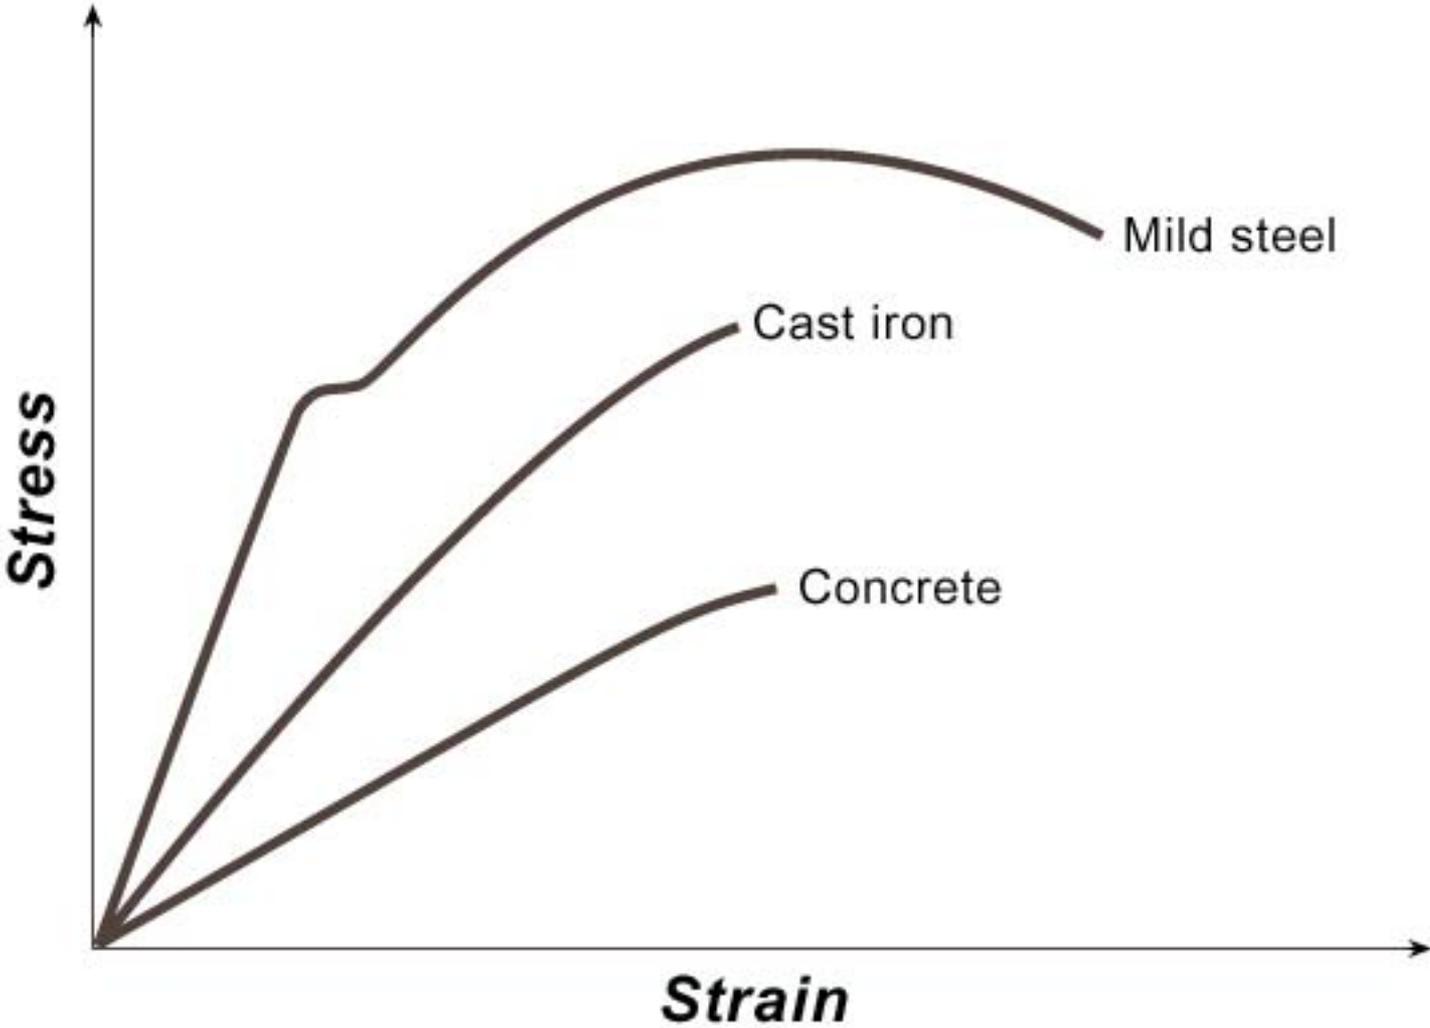


Ductility of Steel

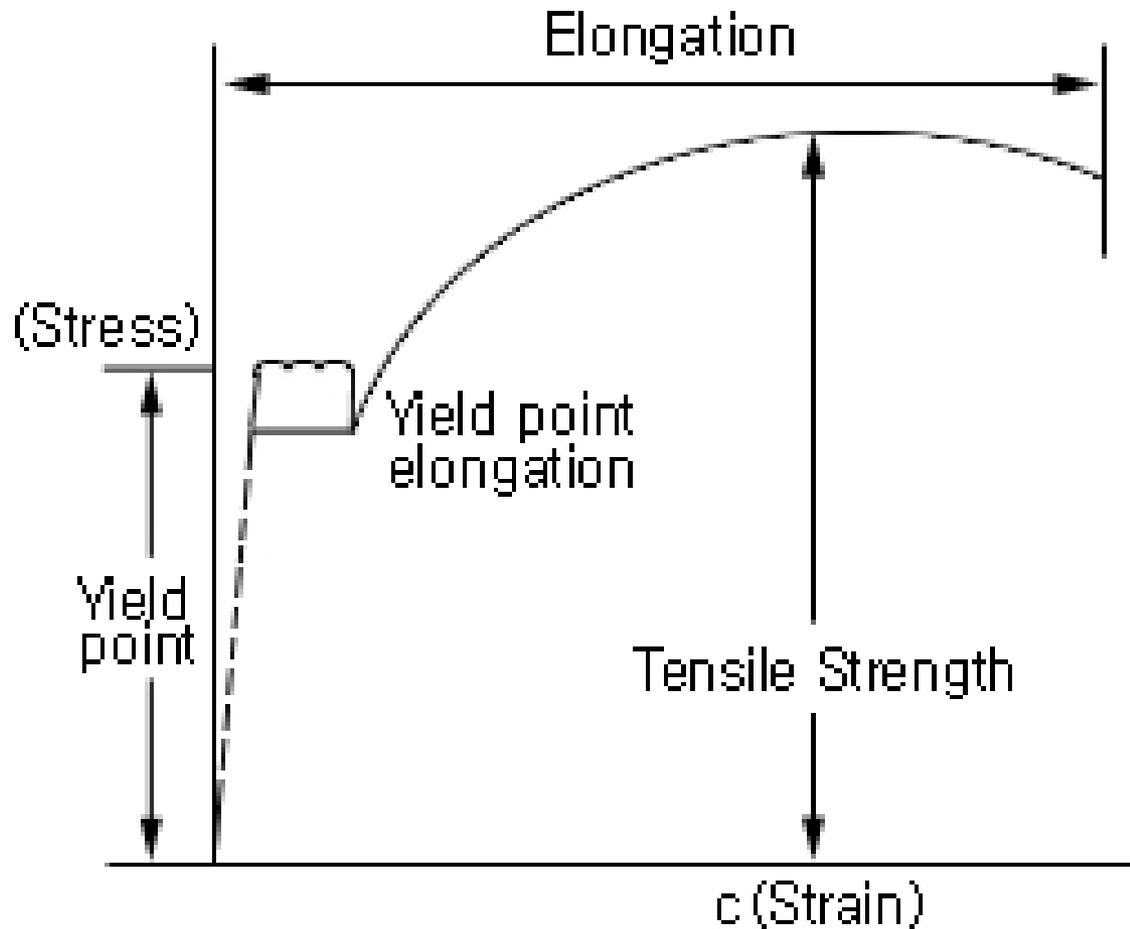

Importance of Ductility

- **Large displacements before collapse (as opposed to a *brittle* material, which fails suddenly)**
- **Energy dissipation as the steel yields (important for resisting earthquakes and other overloading)**

Yield Stress of Steel

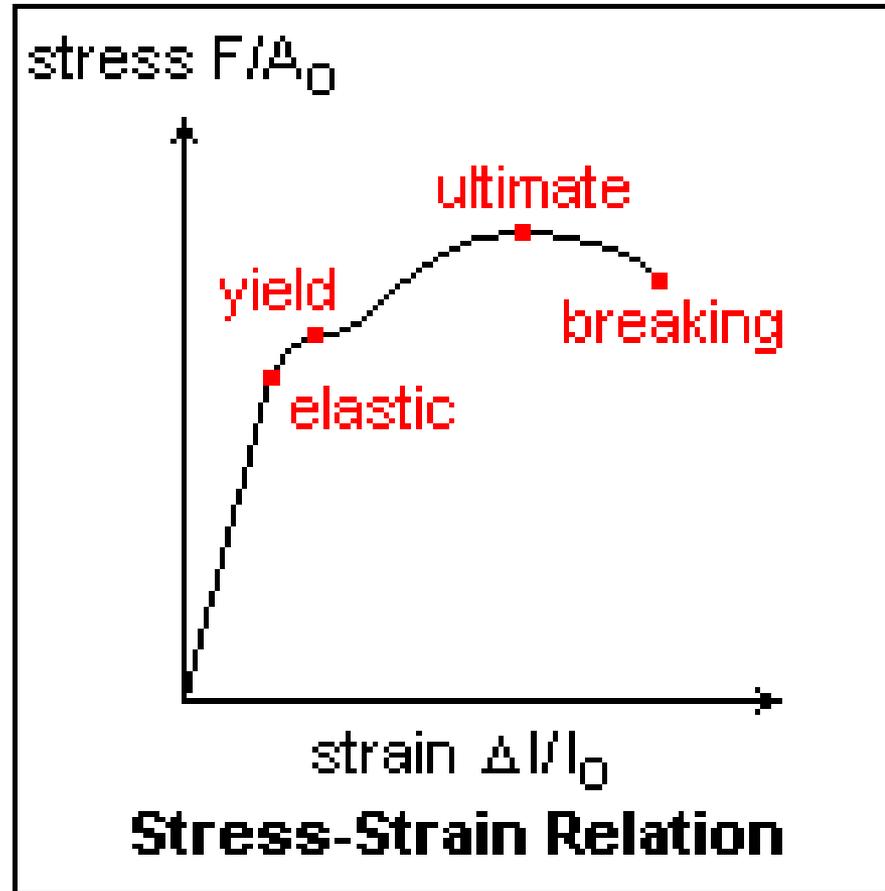

Yield Stress of Steel

Steel Type	Yield Stress	Ultimate Stress
A36	36 ksi (kips/in²)	~50 ksi
A50	50 ksi	~67 ksi
High Strength	80 ksi	Up to 100 ksi

How far down can a steel cable hang under its own weight?

Specific weight of steel: 490 lbs/ft³

Stress = Force/area


Ultimate Stress	Length of cable before breaking
------------------------	--

50 ksi	~15,000 feet (4.5 km)
---------------	------------------------------

67 ksi	~20,000 feet (6 km)
---------------	----------------------------


100 ksi	~35,000 feet (11 km)
----------------	-----------------------------

Bending Stresses in a Beam


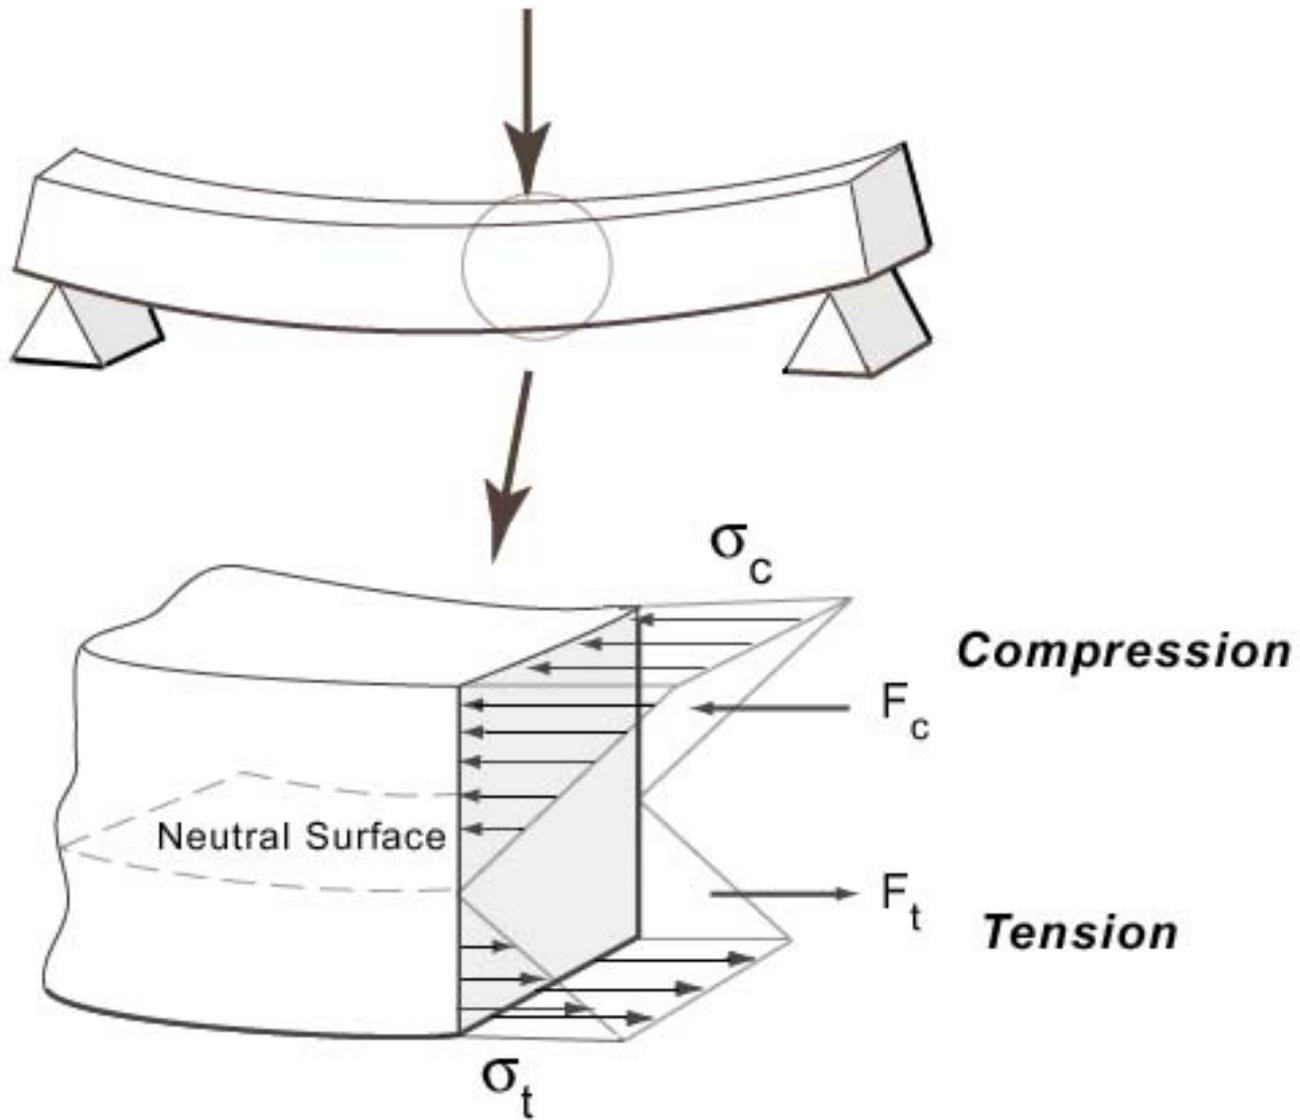


Steel Section Terminology


Beam Technology

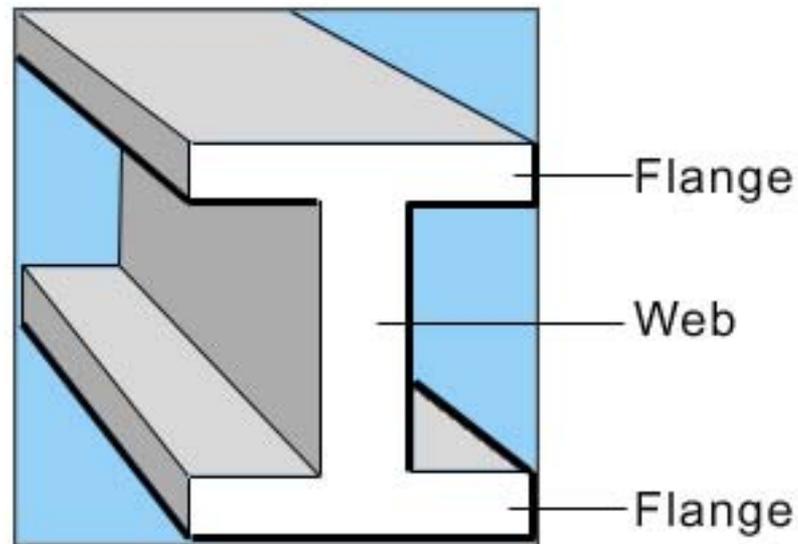


Steel Section Terminology

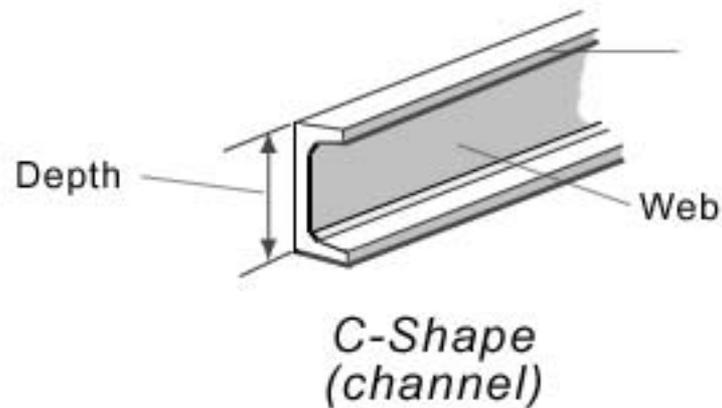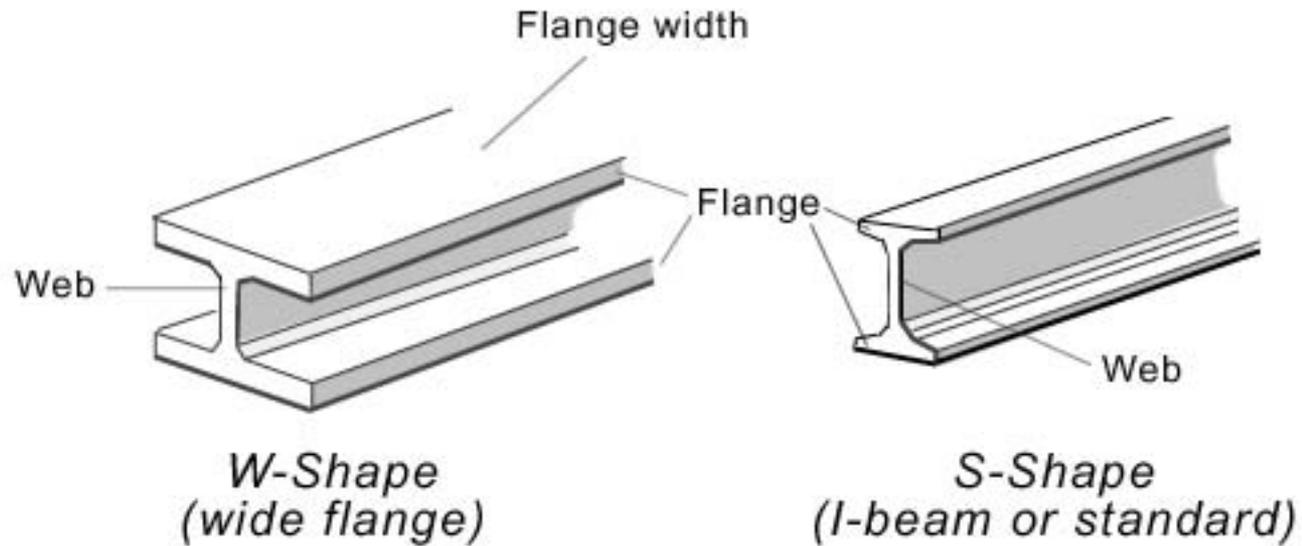


Shear Diagrams

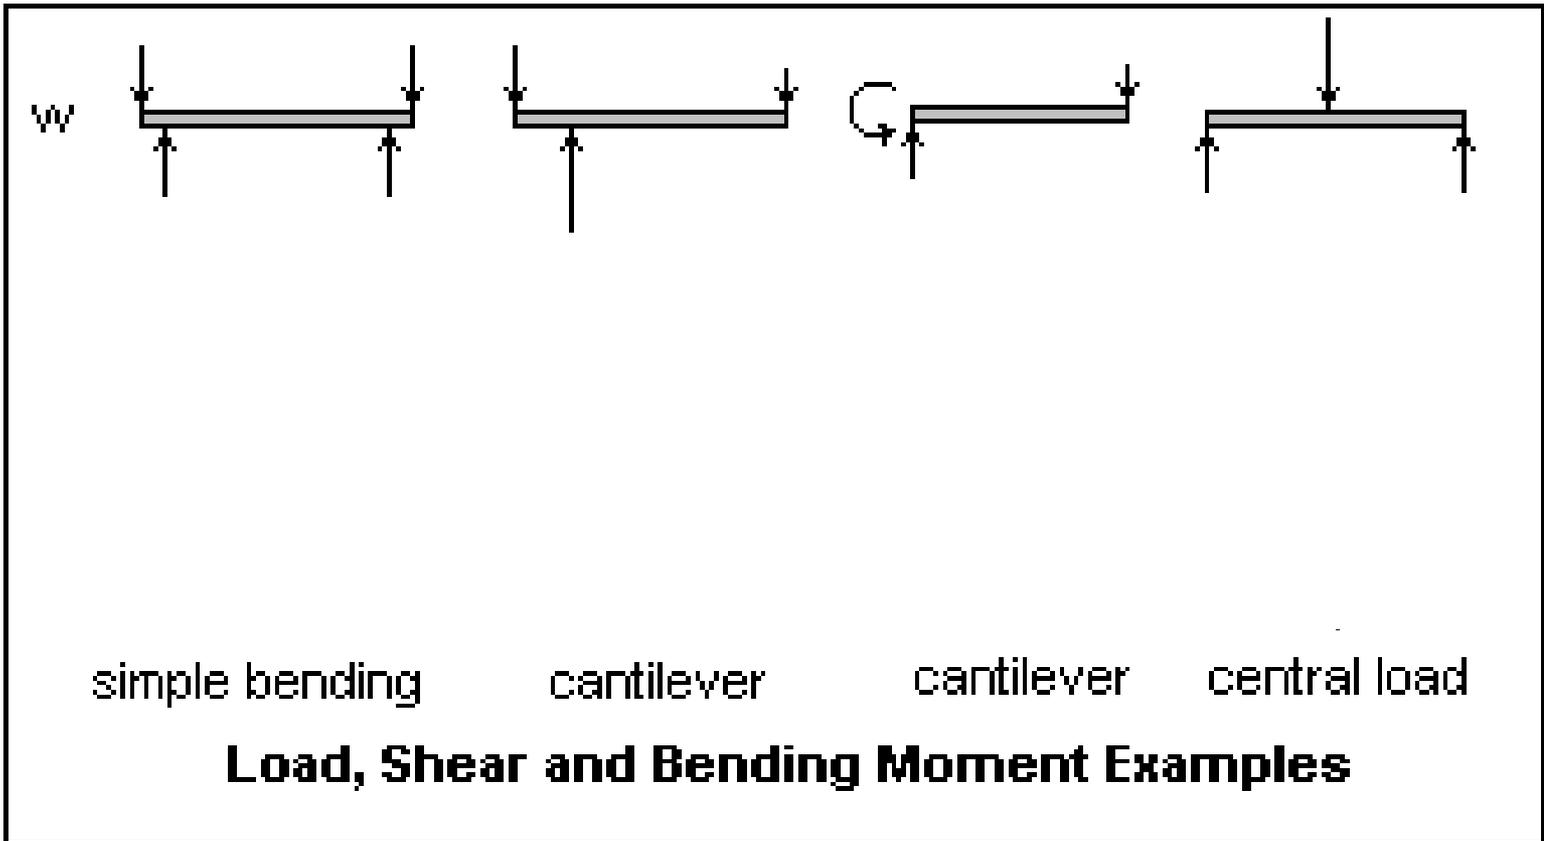


Shear Diagrams

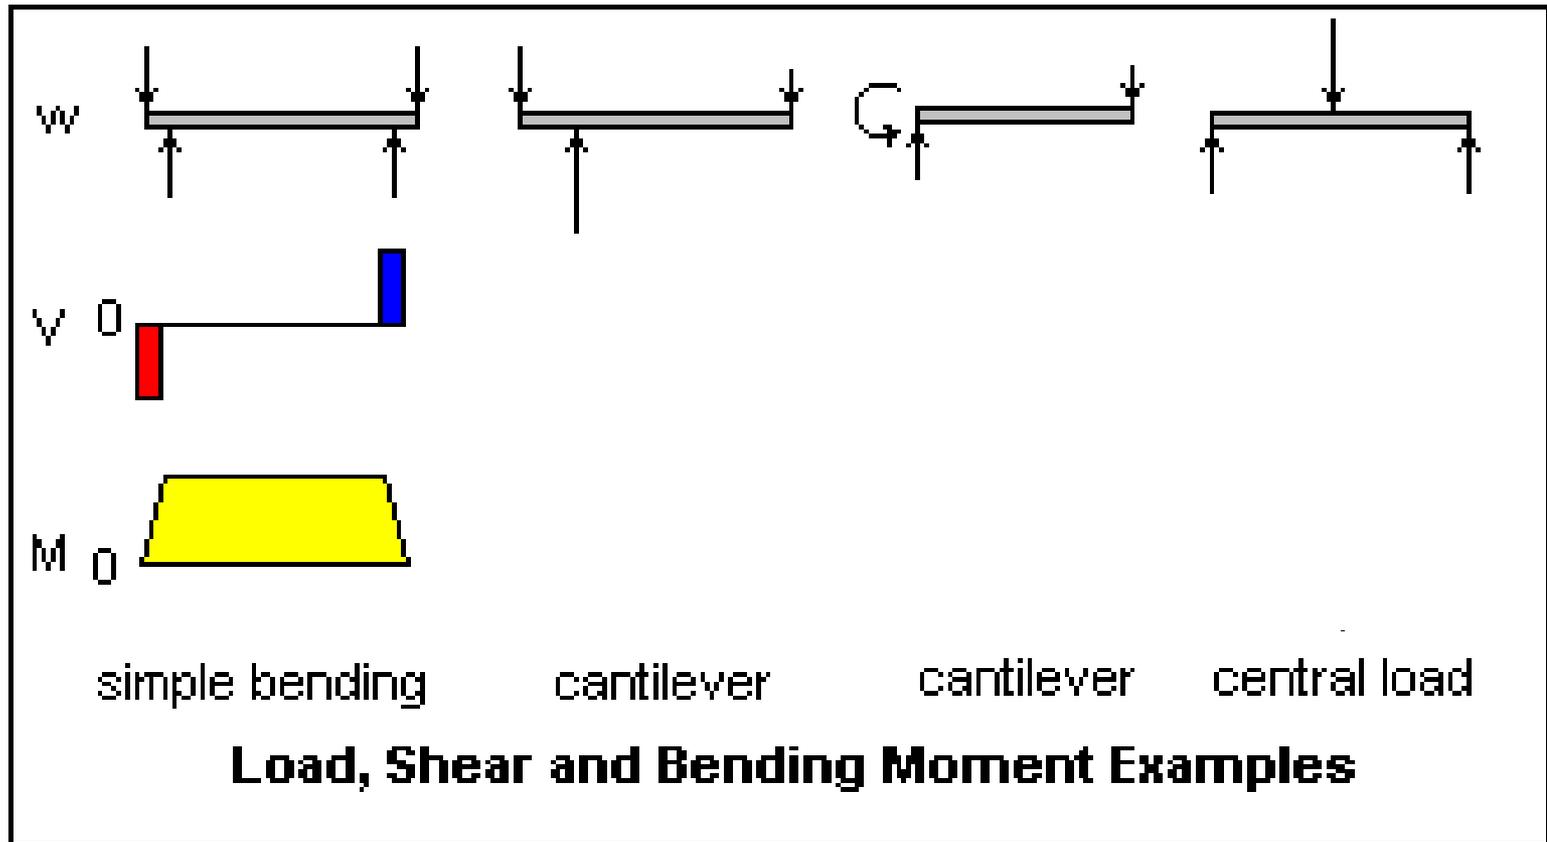


Shear Diagrams

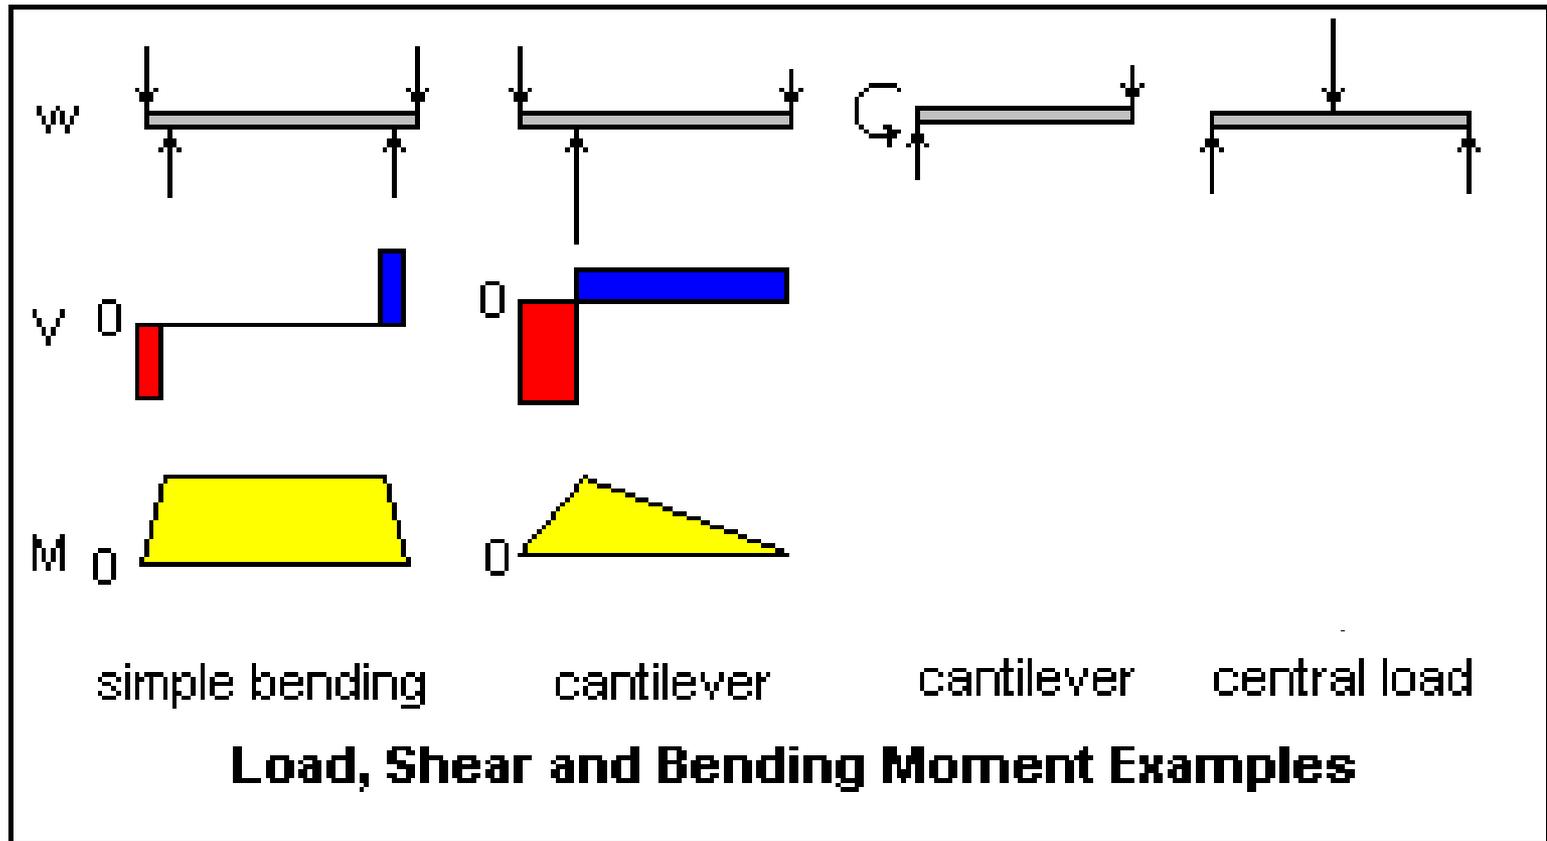

Shear Diagrams

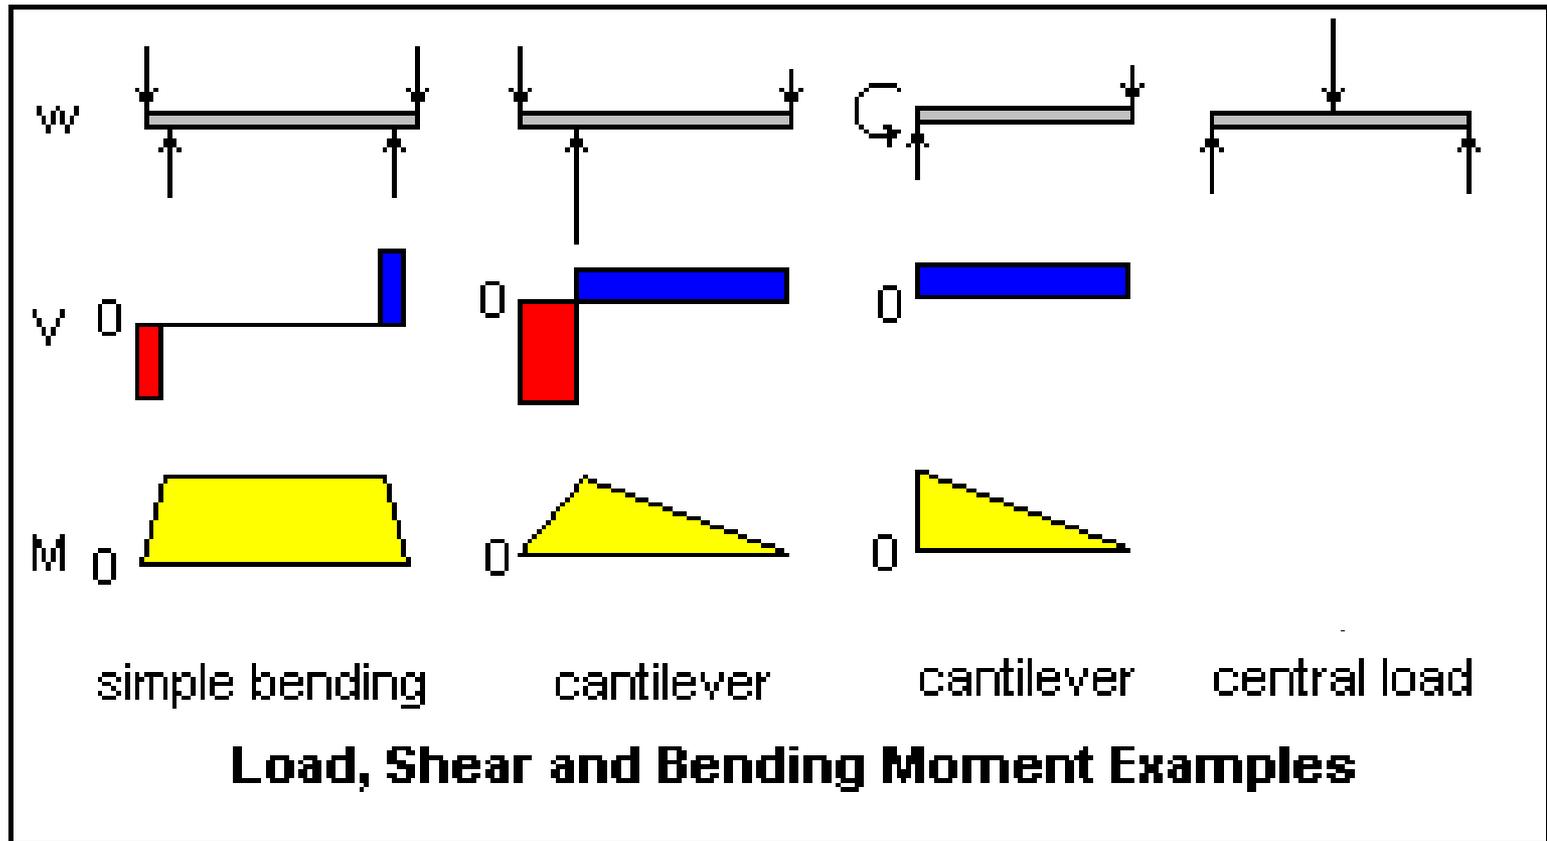


Shear Diagrams

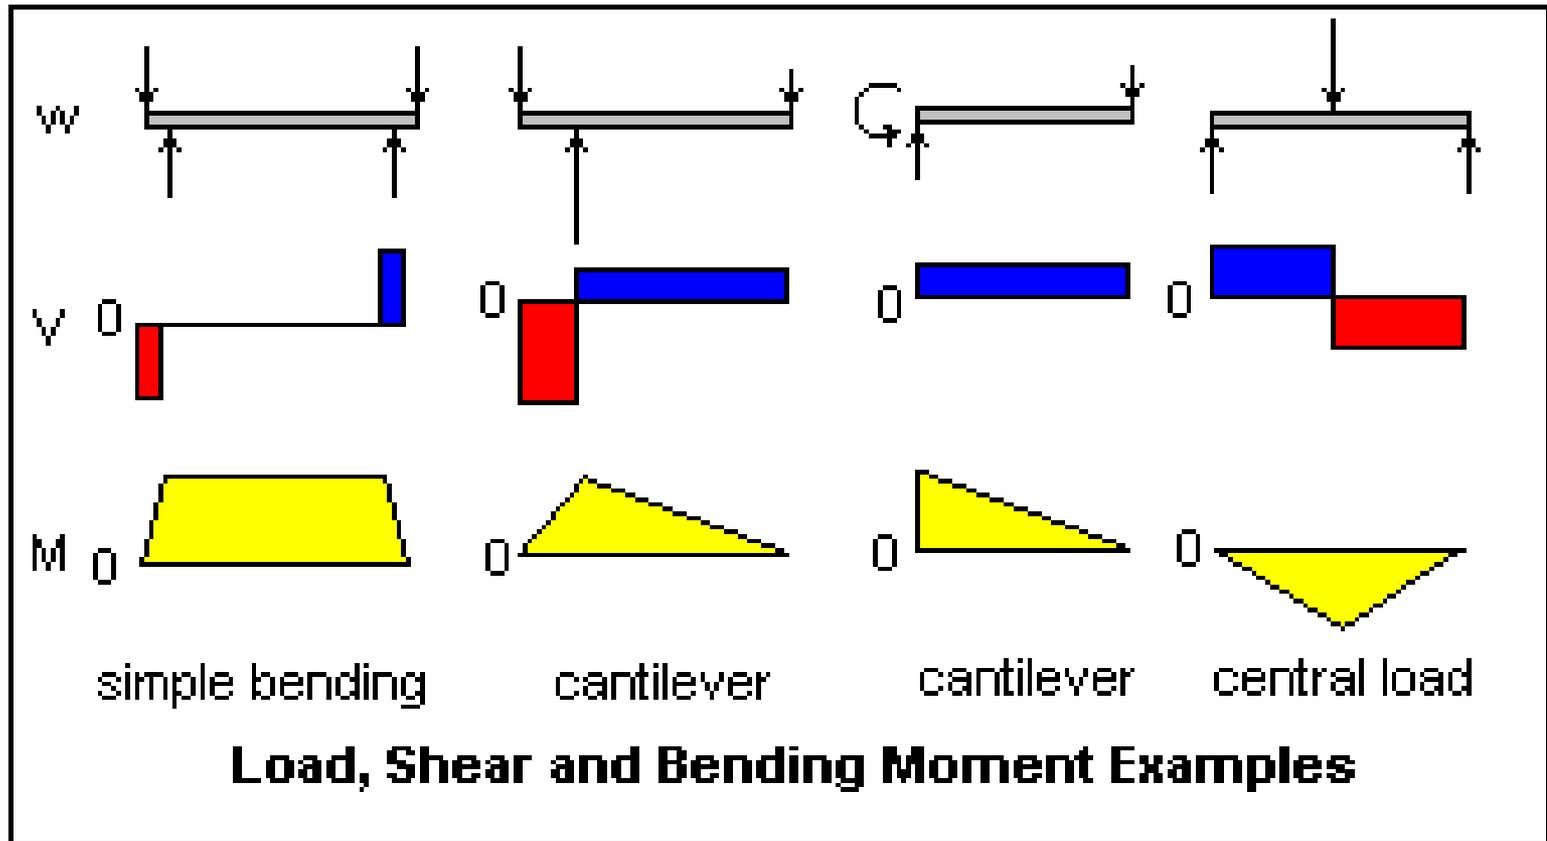

How to draw a shear diagram


- 1) Determine external reactions on beam**
- 2) “Walk” along beam with your pen**
- 3) Pen goes up and down with the loads**
- 4) Must “close” diagram at the ends of the beam**

Shear Diagrams

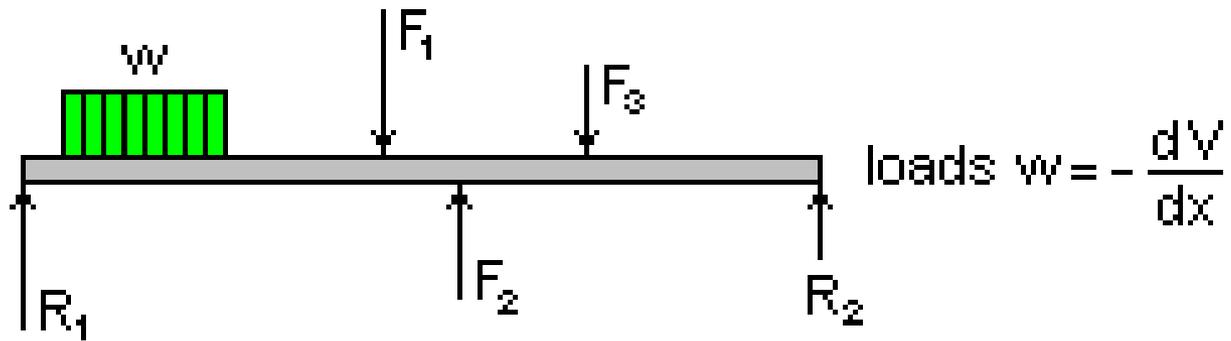


Load, Shear and Moment Diagrams

Shear Diagrams

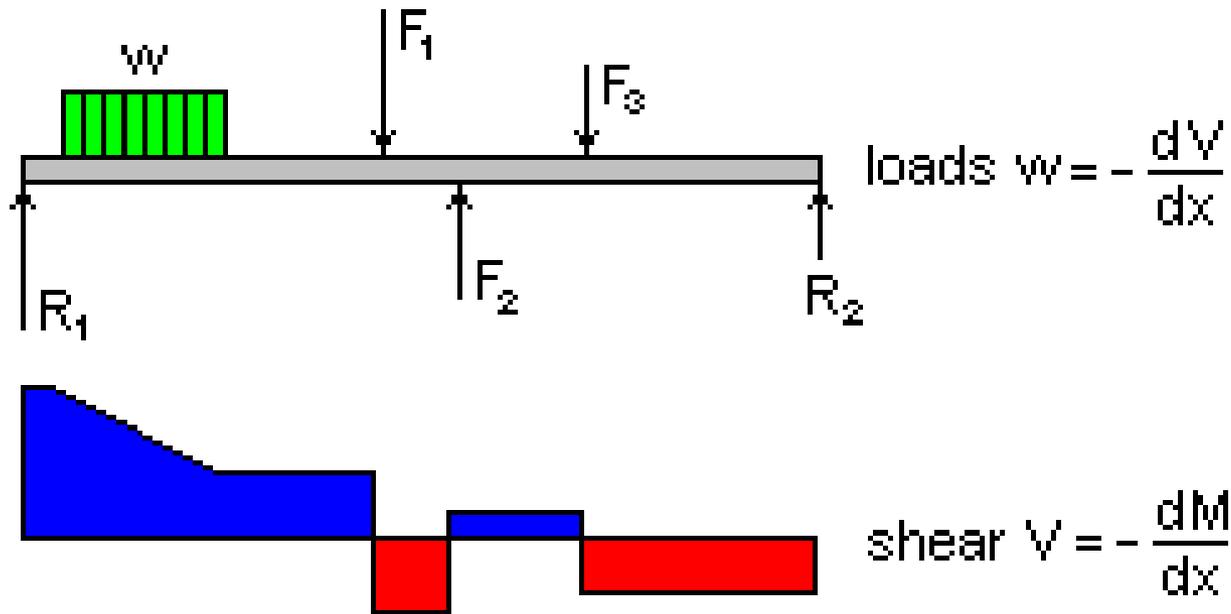

Load, Shear and Moment Diagrams

Shear Diagrams

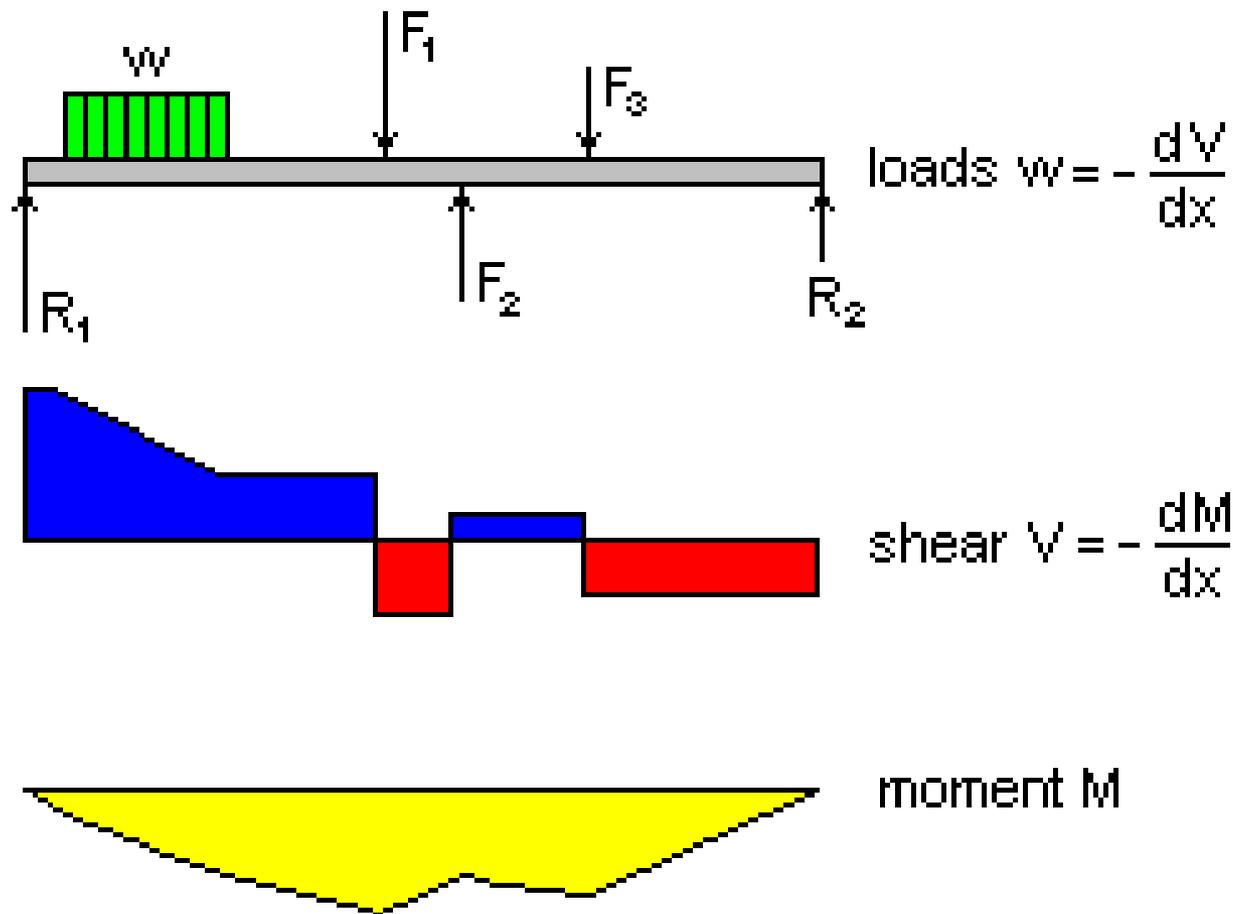

Load, Shear and Moment Diagrams

Structural Failure

- **STRENGTH**

- Material failure
- Buckling (due to instability of section)

- **SERVICEABILITY**

- Excessive deflections or vibrations
- Cracking (usually in concrete)

Stiffness of Steel

- **STRENGTH**




- Higher yield stress allows smaller sections

...but...


- **SERVICEABILITY**

- Stiffness of steel is constant (modulus of elasticity, E)
- Deflections, vibrations, and buckling become more common

Shear Diagram for Uniform Load

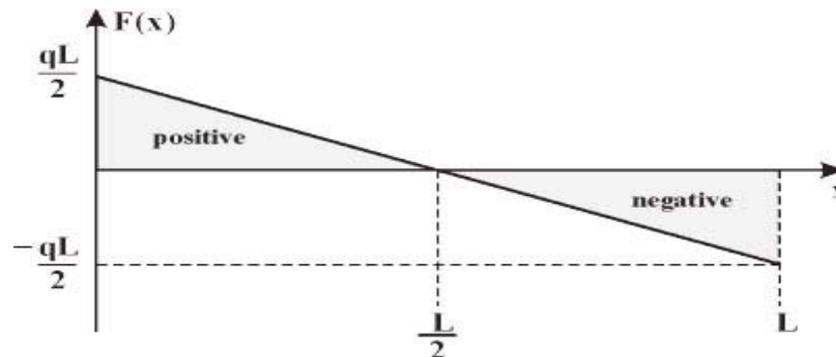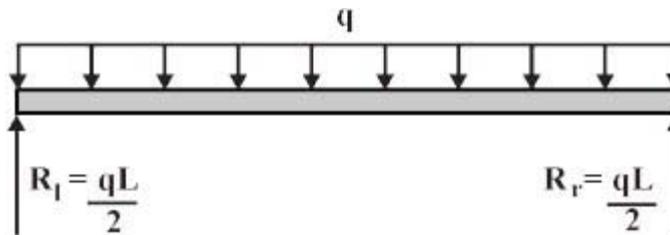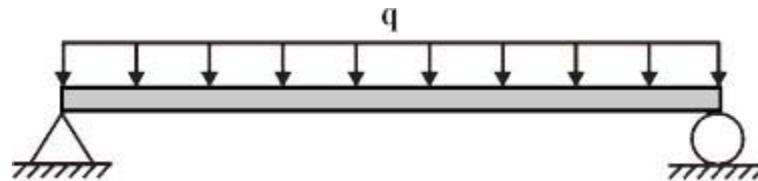


Shear Diagrams

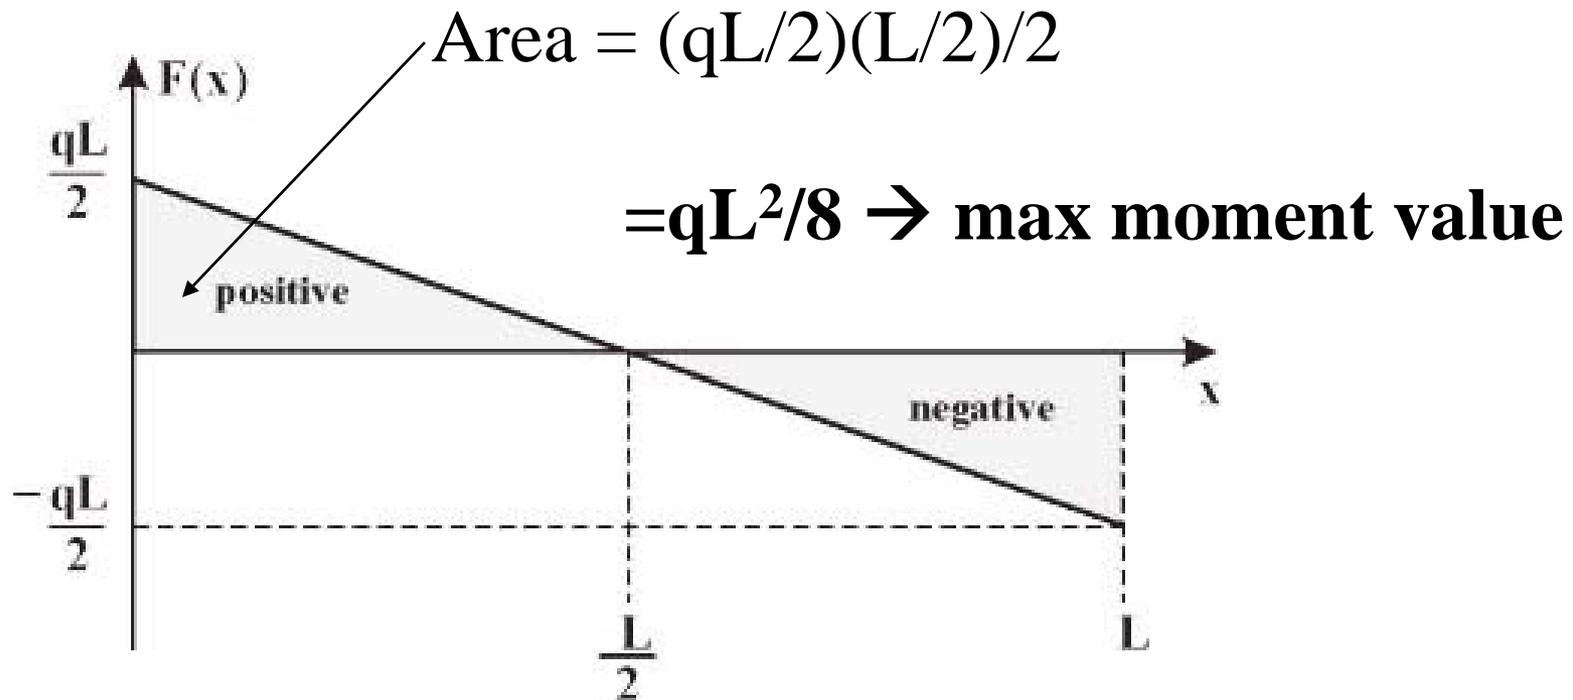

Shear diagram equals the slope of moment diagram

Is steel a green material?


Ecological Profile of Materials

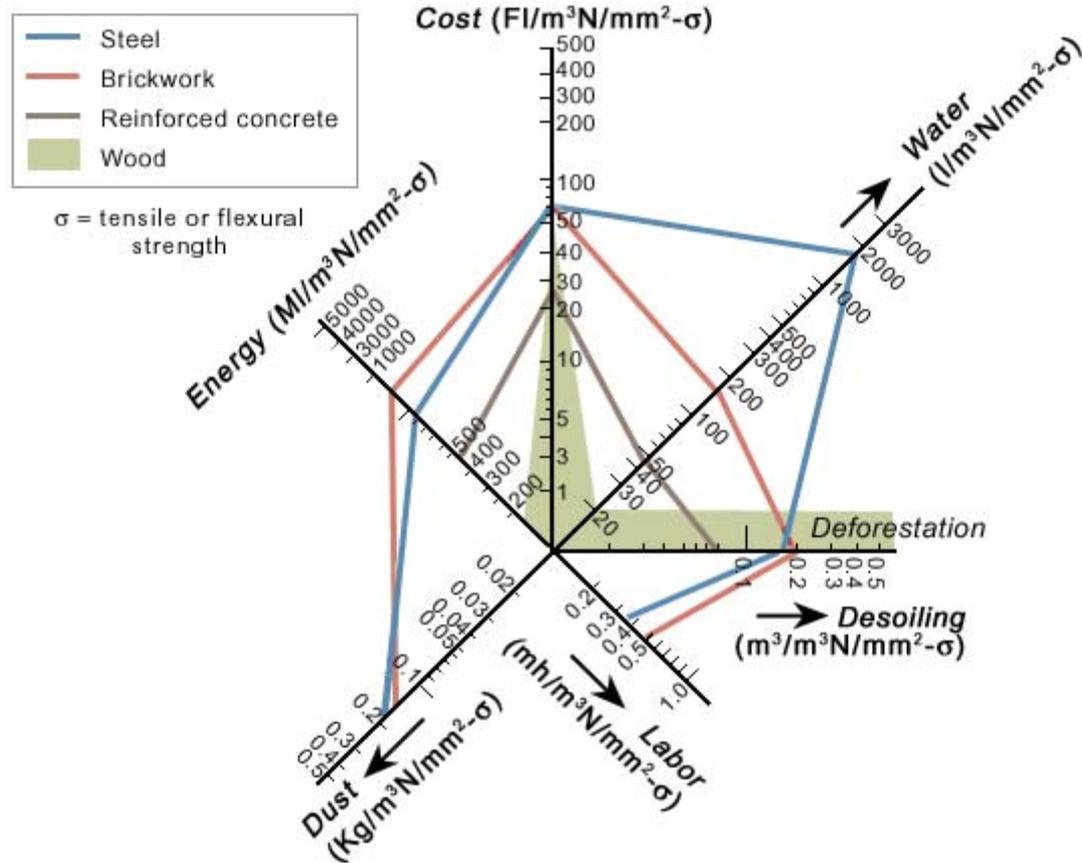

Ecological profile of various material properties expressed per unit strength.

The Institution of Structural Engineering

CO₂ Emissions for Steel

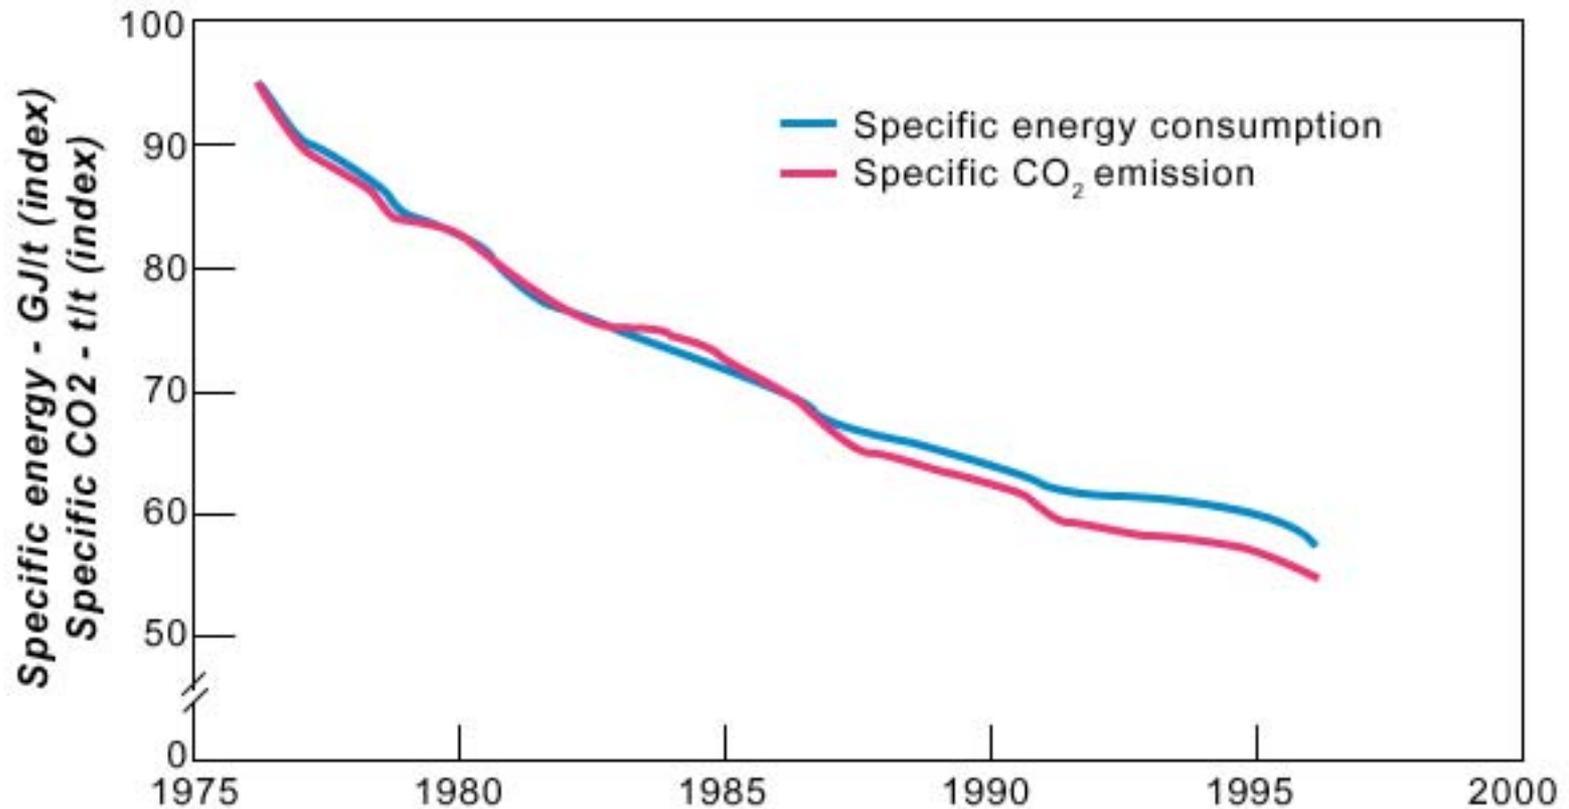

EU steel industry consumption per tonne of hot-rolled steel
EU Steel Industry CO₂ emission per tonne of hot-rolled steel
(3 year moving averages)

Recycled content for steel

Type of steel	Percent recycled
Structural steel	90%
Light gauge steel	30%

Each ton of recycled steel saves 1200 pounds of coal

Environmental Advantages of Steel

- **Lower weight reduces foundation requirements**
- **Highly recycled and can continue to be recycled indefinitely**
- **Durable, if protected from corrosion**

Environmental Disadvantages of Steel

- **Very high energy use, predominantly from burning coal → produces pollution**
- **Lightweight, so lower thermal mass compared to concrete → requires more insulation**
- **Is susceptible to corrosion**

Corrosion of Steel

Corrosion costs around 4% of GDP

Every 90 seconds, across the world, one ton of steel turns to rust; of every two tons of steel made, one is to replace rust.

How to avoid corrosion?

- **Careful detailing to protect from water**
- **Use stainless steel**
- **Protect steel with galvanizing (zinc coating) or other protective coating**


Stainless Steel Disadvantages

- **High initial cost**
- **Difficulty in fabricating can often result in costly waste**
- **Difficulty in welding**
- **High cost of final polishing and finishing**

Conclusions

- **Steel offers many advantages, primarily high strength and ductility**
- **Shear diagrams can be used to determine locations of high stresses (and are helpful in drawing moment diagrams)**
- **Lightweight structures are susceptible to vibrations and excessive deflections**
- **Environmental impact can be reduced through design**

Ecological Profile of Materials

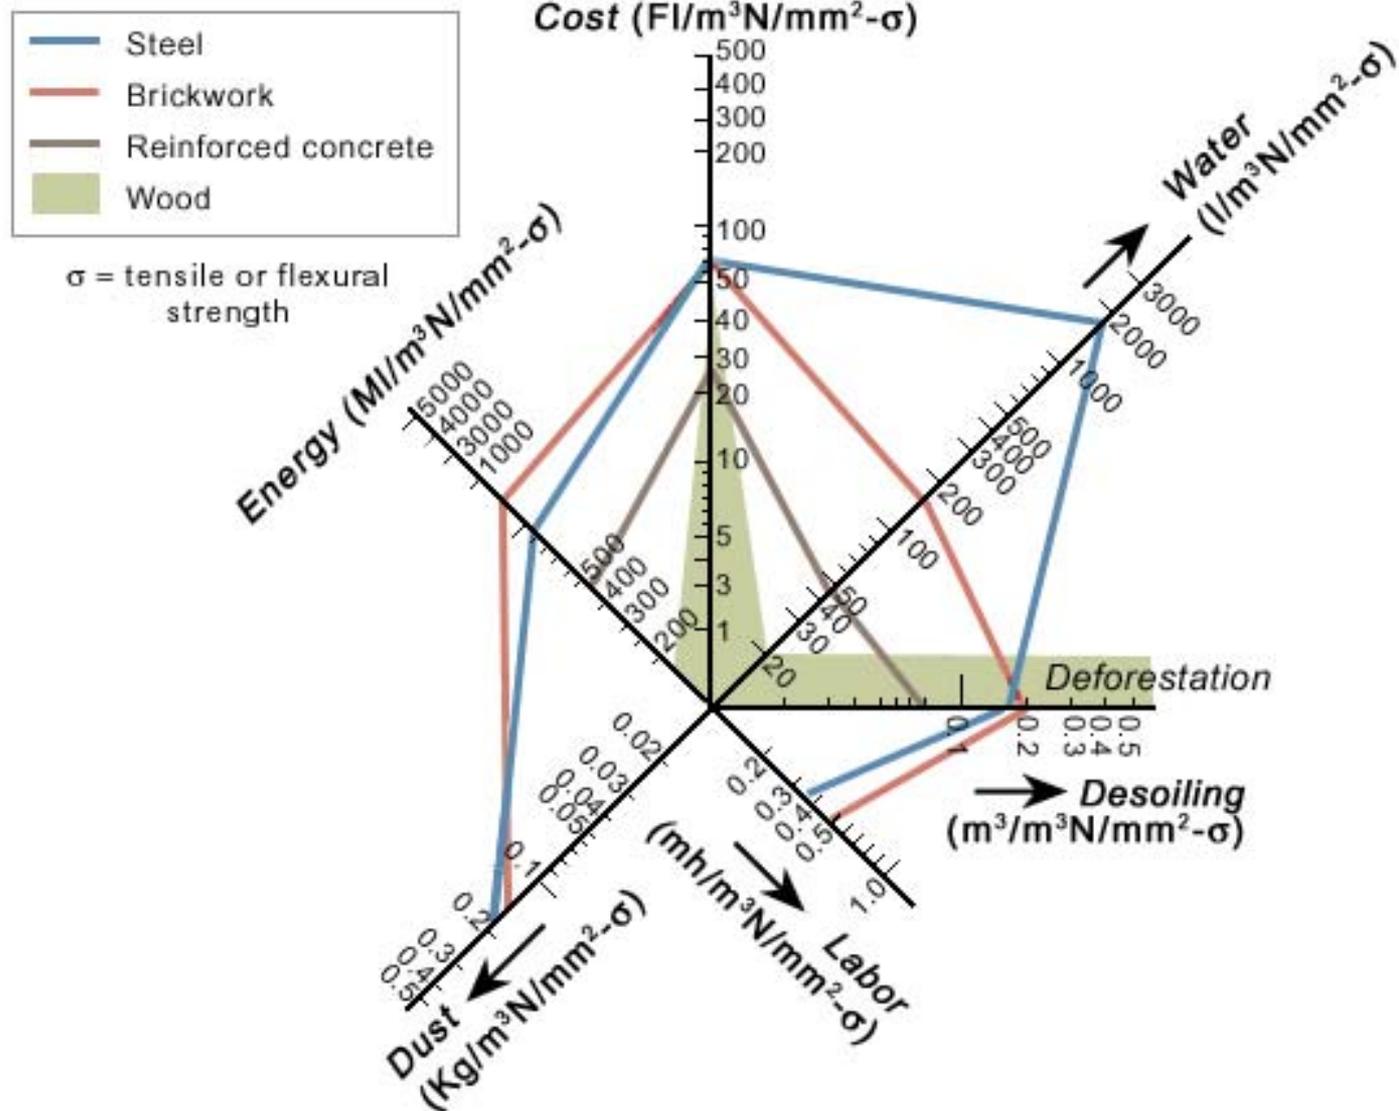

Ecological profile of various material properties expressed per unit strength.

Ecological Footprints

COUNTRY	POPULATION 1997	FOOTPRINT (ha/cap)	AVAILABLE CAPACITY (ha/cap)	DEFICIT (ha/cap)	TOTAL FOOTPRINT (km ²)	TOTAL CAPACITY (km ²)
India	970,230,000	0.8	0.5	-0.3	7,761,840	4,851,150
China	1,247,315,000	1.2	0.8	-0.4	14,967,780	9,978,520
Peru	24,691,000	1.6	7.7	6.1	395,056	1,901,207
France	58,433,000	4.1	4.2	0.1	2,395,753	2,454,186
Germany	81,845,000	5.3	1.9	-3.4	4,337,785	1,555,055
Canada	30,101,000	7.7	9.6	1.9	2,317,777	2,889,696
United States	268,198,000	10.3	6.7	-3.6	27,623,467	17,968,663
WORLD	5,892,480,000	2.8	2.1	-0.7		

Ecological Footprints for Selected Countries

[Data Source: Wackernagel, Mathis, Larry Onisto, et. al. Ecological Footprints of Nations: Rio+5 Forum Study, March 10, 1997.]